

TECH DATA


Williams Everlastic® 1300 Series Concrete Gray Sponge Rubber Joint Filler

Description

- Preformed, chemically blown, sponge rubber comprised of all virgin polymer and containing no reclaim rubber or factice.

Material Specifications

- ASTM D - 1752 - Type 1 Sponge Rubber
- Federal: HH - F - 341f Type II, Class A
- AASHTO - M - 153 - Type 1

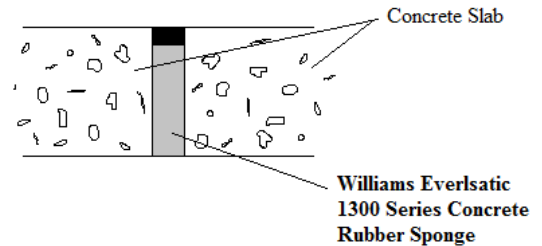

Available Roll Sizes

- Thickness: ¼" x 36" x 60 LF; 3/8" x 36" x 60 LF; ½" x 36" x 36 LF; ¾" x 36" x 30 LF; 1" x 36" x 24 LF
- May be laminated to other thickness
- Widths: Cut to order, Minimum ½"; Maximum 36"

Availability

- Typically shipped from shelf stock, cut to order.

Applications

- Expansion joint filler material in a variety of construction joints, particularly in concrete cast - in - place applications.
- Where concrete is poured on an incline or decline plan or thicker concrete pours where lateral loads at the base require a firmer joint treatment.

Typical Physical Properties

Property	Test Method	Typical Values
Density	ASTM D - 1564	30 lbs/ cubic foot
Compression Deflection 50%	ASTM D - 1752	70 psi.
Recovery	ASTM D - 1752	98 %
Weathering	ASTM D - 545	Pass
Extrusion, inches max.	ASTM D - 1752	.250



We do not guarantee the applicability or accuracy of this information or the suitability of our products for any given situation. Users should make their own tests to determine the suitability of any product for their particular purpose. The products discussed are sold without warranty, either expressed or implied, buyer assumes all responsibility for any loss or damage arising from the handling or use of our products, whether done in accordance with directions or not. Statements concerning the possible use of our products are not intended as recommendations to use our products in the infringement of any patent.

Williams Products, Inc. • 1750 Maplelawn Blvd. • Troy, Michigan 48084 • Ph: 800-521-9594 Fax: (248) 643-7117

www.williamsproducts.net