

TECH DATA

Everlastic® 1350 Series Dust Shield Ceiling Tile

Description

- Open Cell Polyurethane
- Off-White in color.

revised 6-20-03
revised 10-06-05
revised 12-11-06

Available Sizes:


- Available in crude buns, sheeted rolls, saw cut shapes, and roll goods with Pressure Sensitive Adhesive (PSA)

Applications

- Medium density polyether foam, firm ILD range, designed to meet a broad range of furniture Automotive seating, and dust shields for ceiling tile.

Typical Physical Properties	Test Method	Typical Values
Color		Off - White*
Density	ASTM 3574	1.5± 0.5 pcf.
Tensile Strength	ASTM 3574	12 psi. min.
Elongation	ASTM 3574	150 % min
Tear Resistance lbs/in.	ASTM 3574	1.5 psi. min
Compression Set	ASTM 3574	10% max
Odor		No Objectionable Odor
Load Deflection	ASTM 3574	40± 4 lbs
Flammability	MVSS - 302	Pass
Cold Flexibility		No Deterioration
Cell Size 60 cpi		

* Will discolor to cream and or yellow with age.

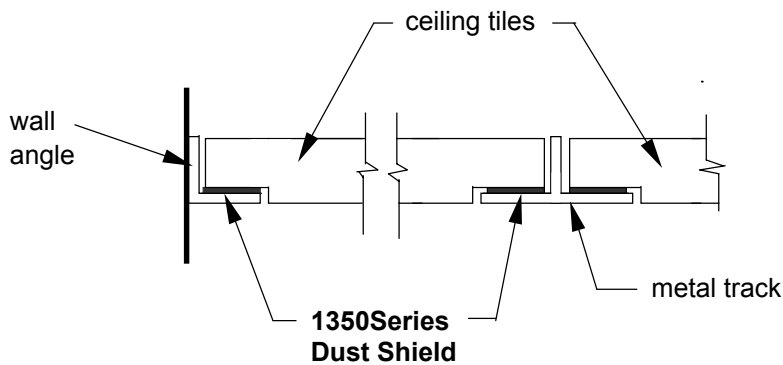

To the best of our knowledge this published information is accurate, however, to determine suitability of material/product for a specific application is the user's responsibility. Williams Products, Inc. shall not be liable for any loss or damage resulting from inappropriate usage.

WILLIAMS PRODUCTS, INC.

1750 MAPLELAWN BOULEVARD - TROY MICHIGAN 48084 - PHONE (248) 643-6400 - TOLL FREE (800) 521-9594 - FAX (248) 643-7117

www.williamsproducts.net