



Williams Products, Inc

1750 Maplelawn

Troy, MI. 48084


Toll Free: 800-521-9594 Phone: 248-643-6400

Fax: 248-643-7117

Closures

Description

Closed Cell EPDM Synthetic Rubber Closures.
Available in 1" thick (& 1-1/2" thick) horizontal
gray, black & redwood colors.

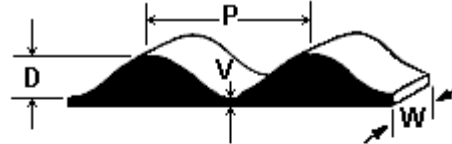

PITCH	Is the distance from peak to peak of a corrugation.
DEPTH	Is the distance from top of the peak to the inside of the valley.
WIDTH	Is the thickness of the flat surface of the closure.
VALLEY	Is the thickness from the bottom of the strip to the bottom of the corrugation.

Typical Physical Properties

Property	Typical Values
Density	12.8 lbs./ft ³
Water Absorption	By Weight 0.93%
ASTM D-1056 (Vacuum)	By Volume 0.21%
Ozone Resistance	No Cracking, ASTM D-1171 (Bent Loop)
Migration Stain Test	No Staining, ASTM D-925
High Temperature	No Deleterious Effects, 212°F ASTM D-573
Low Temperature	No Brittleness -40°F ASTM D-746(B)
Tensile 190 psi	ASTM D-412
Elongation 210%	ASTM D-412
Compression Set 7.4%	ASTM D-1056

