

TECH DATA


Williams Everlastic® 1752 Highway/Modified

revised 6-20-03

revised 10-06-05

Description

- Isomeric Polyolefin Resilient Flexible Foam
- Gray in color

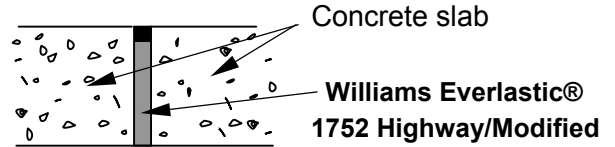

Applications

- Everlastic 1752 Highway/Modified Expansion Joint filler used with hot or cold applied sealants; Horizontal applications, place **Everlastic® 1752 Highway/Modified** next to forms; all interrupting columns and objects; adjacent to abutting structures prior to concrete placement. Vertical applications include **Everlastic® Highway/Modified** placement between panels, panel to column joints or in block wall joints prior to sealing. And many other uses.

Available Sizes:

- Standard Thickness: 1/8" thru 3" (other sizes skived or laminated)
- Widths from 1/2" to 36"; available multi-score, standard-score, or with tear tab to allow sealant reservoir (Available in rolls only 1/2" thru 1/2").
- Self-Stick Pressure Sensitive Adhesive optional. (will die cut parts)
- Roll (1/8" thru 1/2") lengths 50 lf. Sheet (5/8" thru 3") lengths 9 lf.
- **Everlastic® Highway/Modified** must be held in place by either compression or sealant to reduce float.

Property	Test Method	Typical Values
Density	ASTM D -3575	2 lbs/cu. Ft.
Tear Resistance CM	ASTM D -3575	11 psi
Compression Strength		
10% Deflection		2.6 psi
25% Deflection		5 psi
40% Deflection		9.6 psi
50% Deflection		15 psi
Compression Set % of original thickness		25%
Elongation	ASTM D -3575	120%
Tensile Strength CM	ASTM D -3575	40 psi
Water Absorption (lbs/sf of cut surface)	ASTM D -3575	<0.07
K Factor	ASTM - 177	0.25
Service Temperature 1/4" and thicker	PPP C - 1752	
Low		-65°F
High		+210°F
Thermal Stability (change after 24 hrs @ 158°F)	ASTM D -3575	2%



To the best of our knowledge this published information is accurate, however, to determine suitability of material/product for a specific application is the user's responsibility. Williams Products, Inc. shall not be liable for any loss or damage resulting from inappropriate usage.

WILLIAMS PRODUCTS, INC.

1750 MAPLELAWN BOULEVARD - TROY MICHIGAN 48084 - PHONE (248) 643-6400 - TOLL FREE (800) 521-9594 - FAX (248) 643-7117

www.williamsproducts.net